


# 摩托车链

## Motorcycle chains

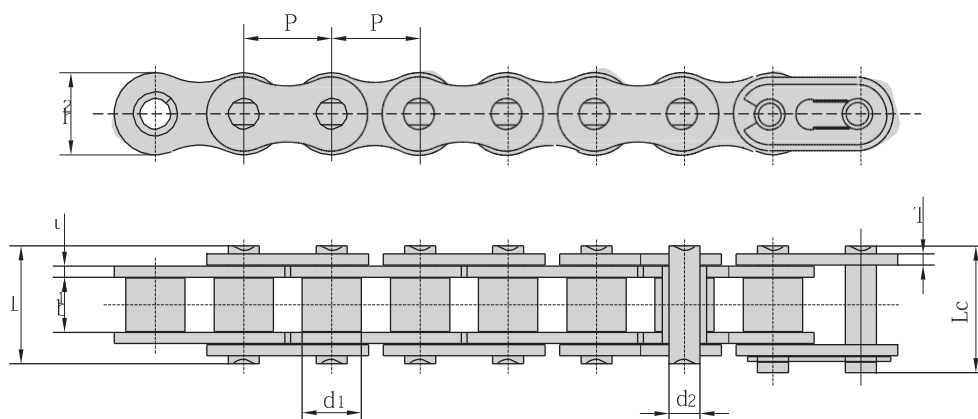

昊荣链号 HaoRong Chain No.	节距	滚子直径	内节内宽	销轴直径	销轴长度		内链板高度	链板厚度	极限拉伸载荷	平均拉伸载荷	每米长重
	Pitch	Roller diameter	Width between inner plates	Pin diameter	L	Lc	Inner plate depth	Plate thickness	Ultimate tensile strength	Average tensile strength	Weight per meter
	P	d <sub>1</sub> max	b <sub>1</sub> min	d <sub>2</sub> max	L max	Lc max	h <sub>2</sub> max	t/T max	Q min	Q <sub>0</sub>	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
25H	6.350	3.30	3.18	2.31	8.90	9.5	6.00	1.04	4.80/1091	5.5	0.17
25HT	6.350	3.30	3.18	2.31	9.20	9.2	5.86	1.14	6.2/1409	7.0	0.19
25SH	6.350	3.30	3.18	2.31	8.90	8.9	5.86	1.03	5.2/1182	5.8	0.18
219H	7.774	4.59	5.00	3.01	11.90	12.7	7.40	1.2/1.0	6.60/1500	7.4	0.28
270H	8.500	5.00	4.75	3.28	13.15	-	8.45	1.8/1.4	9.80/2227	11.0	0.33
T3F	9.525	6.00	9.50	4.50	18.60	-	9.30	1.85/1.	11.80/2682	14.1	0.61
420	12.700	7.77	6.25	3.96	14.70	16.1	12.00	1.50	16.00/3636	18.1	0.55
428	12.700	8.51	7.75	4.45	16.70	18.2	11.80	1.60	18.0/4091	20.1	0.70
428H	12.700	8.51	7.85	4.45	18.80	19.9	11.80	2.03	20.60/4682	23.4	0.79
520	15.875	10.16	6.25	5.08	17.50	19.0	15.09	2.03	26.50/6022	29.7	0.89
520H	15.875	10.16	6.25	5.08	19.30	20.	15.09	2.42	26.50/6022	31.5	1.10
525	15.875	10.16	7.95	5.08	19.30	20.7	15.09	2.03	26.50/6022	29.9	1.06
525H	15.875	10.16	7.95	5.08	20.90	22.3	15.09	2.42	30.00/6022	32.2	1.20
530	15.875	10.16	9.40	5.08	20.70	22.2	15.09	2.03	26.50/6022	29.7	1.06
530SH	15.875	10.16	9.40	5.08	22.10	-	15.09	2.42	32.80/7379	33.5	1.24

\*套筒链:表中滚子直径 d<sub>1</sub> 为套筒直径.

\*Bush chain:d<sub>1</sub> in the table indicates the external diameter of the bush.